

## Product Data

# Quiet Qurl® 013 RF

A Noise Control Mat | Part # 01-X-0054

## Description

Quiet Qurl® 013 RF is a nominal 0.125-inch, random-filament, corrugated, “U”-groove core sound control mat designed to limit impact noise.

It is produced from an extruded polymer matrix of tangled monofilaments, which are heat-welded at the junctions to form a resilient structure that absorbs noise when sandwiched in a mass-spring-mass application.

Quiet Qurl 013 RF is the first entangled net product to be used in a system with less than an inch of total thickness. The system is engineered for sound mat and a gypsum concrete pour between 0.75” to 0.875”. Quiet Qurl 013 RF, is a Class A fire-rated product.

It is made with a reinforced scrim and fabric combination to give the gypsum concrete some added tensile strength. Testing has shown that the addition of a combination reinforced scrim and fabric will enhance tensile strength up to 20%. The 95% void means that the finished floor will only have 5% contact with the subfloor, greatly limiting vibration.

The recycled content provides LEED® points for the project. The product has been shown to provide code-compliant IIC performance similar to sound products 0.25” in thickness, even with ceramic tile and bare gypsum concrete.

## Applications

- ✓ Multi-family construction: apartments and condominiums
- ✓ Thin-pour applications for less transition
- ✓ When a resilient ceiling is installed
- ✓ With gypsum concrete
- ✓ For all hard surface applications in wood frame construction
- ✓ Provides an overall system thickness of 0.75” to 1.0”

## Features and Benefits

Excellent performance at reducing sound in mid and high frequencies


High recycled polymer content for LEED® credit

Insulation value through the 95% airspace it creates


Minimal deflection, and no creep or long-term degradation

Provides a thin profile for tight construction assemblies

Lightweight and easy to handle



Patent No.: US 7,096,630  
& US 8,146,310

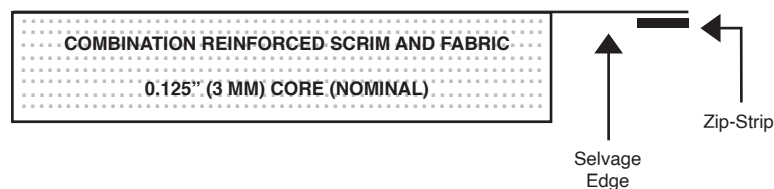

## Physical Properties

Description	Means of Measurement English/Metric		Value English/Metric	
Core Polymer	Polymeric			
Thickness	Inches	Mm	0.125	3.0
Total Weight	oz/yd <sup>2</sup>	g/m <sup>2</sup>	9.7	325
Core Weight	oz/yd <sup>2</sup>	g/m <sup>2</sup>	6.4	250
Fabric Weight	oz/yd <sup>2</sup>	g/m <sup>2</sup>	2.3	75

## Packaging

Description	Means of Measurement English/Metric		Value English/Metric	
Core Width	Inches	CM	48.0	122
Length	Feet	Meters	100	30.0
Area	Square Feet	Square Meters	400	37.1
Roll Diameter	Inches	CM	16.0	41.0
Roll Weight	Pounds	Kg	35.0	15.8

See installation instructions for methods and procedures.

### Limitations:

1. Always use perimeter isolation on all walls and penetrations where QUIET QURL will be installed.
2. Always use bulk head to define the area where QUIET QURL will be installed and where carpeted areas without sound mat will begin (see KEENE IDEA).
3. Compressive strength should be a minimum 2000 psi for gypsum underlayment.
4. Gypsum underlayment can crack at doorways and outside corners, consider reinforcement in those areas.
5. Heavy traffic areas and a confluence of doorways can be prone to cracking, consider reinforcement in those areas.
6. ADA units with constant wheeled traffic can be prone to cracking, consider thicker underlayment, reinforcement and floor finishes that spread the load over a greater area.
7. Field sound tests cannot be guaranteed since each component in the assembly and its installation are critical to overall STC and IIC performance.

**LIMITED WARRANTY:** Keene Building Products, Inc. warrants to the initial purchaser only that the goods sold hereunder will be free from defects in material and workmanship and, except as otherwise set forth herein, will conform to the specifications provided. If any failure to meet this warranty appears within one year from the date of shipment of the goods, on the condition that Keene Building Products, Inc. will correct any such failure by either replacing or repairing any defective goods, at Keene Building Products, Inc.'s option.

The preceding paragraph sets forth the exclusive remedy for all claims based on failure of or defect in the goods sold hereunder, whether such failure or defect arises before or during the warranty period and whether a claim, however instituted, is based on contract, indemnity, warranty, tort (including negligence), strict liability or otherwise. The forgoing warranty is exclusive and is in lieu of all other warranties whether written, oral, implied or statutory.

**QUIET QURL is a component in an overall floor/ceiling assembly. Its performance is affected by every other component and the likelihood of achieving code compliance is contingent upon many other trades including framers, plumbers, drywall contractors to name a few. Developers and general contractors are responsible for building properly and testing field performance as soon as possible in order to assure the reliability of the project.**

**WARNING:** Laboratory tests are not a guarantee of field performance because of the issues noted above and many other design errors that may occur. Please consult a professional acoustical consultant to assure plans are proper and that the floor/ceiling assembly can perform to expectations.



PO Box 5938  
Cleveland, OH 44101  
Info@KeeneBuilding.com  
KeeneBuilding.com

877 | 514 | 5336  
P 440 | 605 | 1020  
F 440 | 605 | 1120